



# SUBER OXID

Anti-Oxidant Primer & Converter



3 SOLUTIONS IN 1 APPLICATION

# CHEMICAL TRANSFORMATION ACTIVE TREATMENT, NOT JUST COVERAGE.



## 1. NEUTRALIZES

CONVERTS RUST  
ACTIVE AGENTS

## 2. PROTECTS

STOPS FLASH-RUST  
ON CONTACT


## 3. ENDURES

LONG-LASTING  
ATMOSPHERIC BARRIER


# SUBSTRATE COMPATIBILITY COMPATIBILITY

## DIRECT APPLICATION

Apply directly to stable rust.  
No stripping to bare metal  
required.

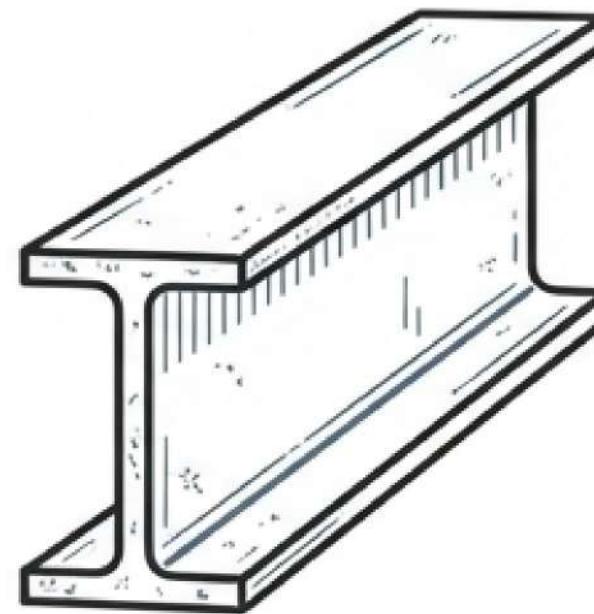


**Iron / Ferrous Metals**

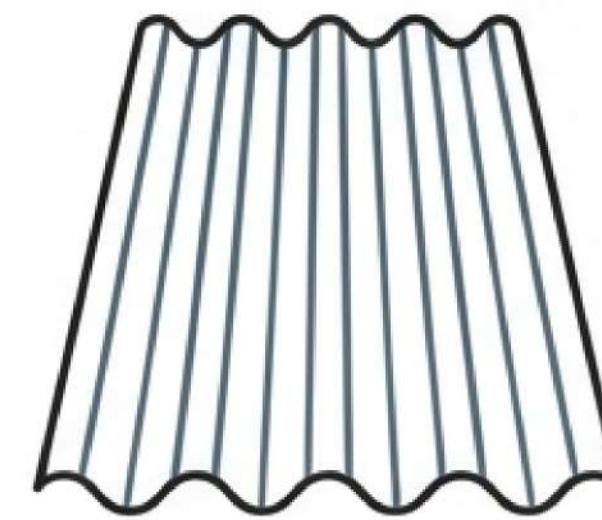

**Galvanized Steel**



**Light Metals**

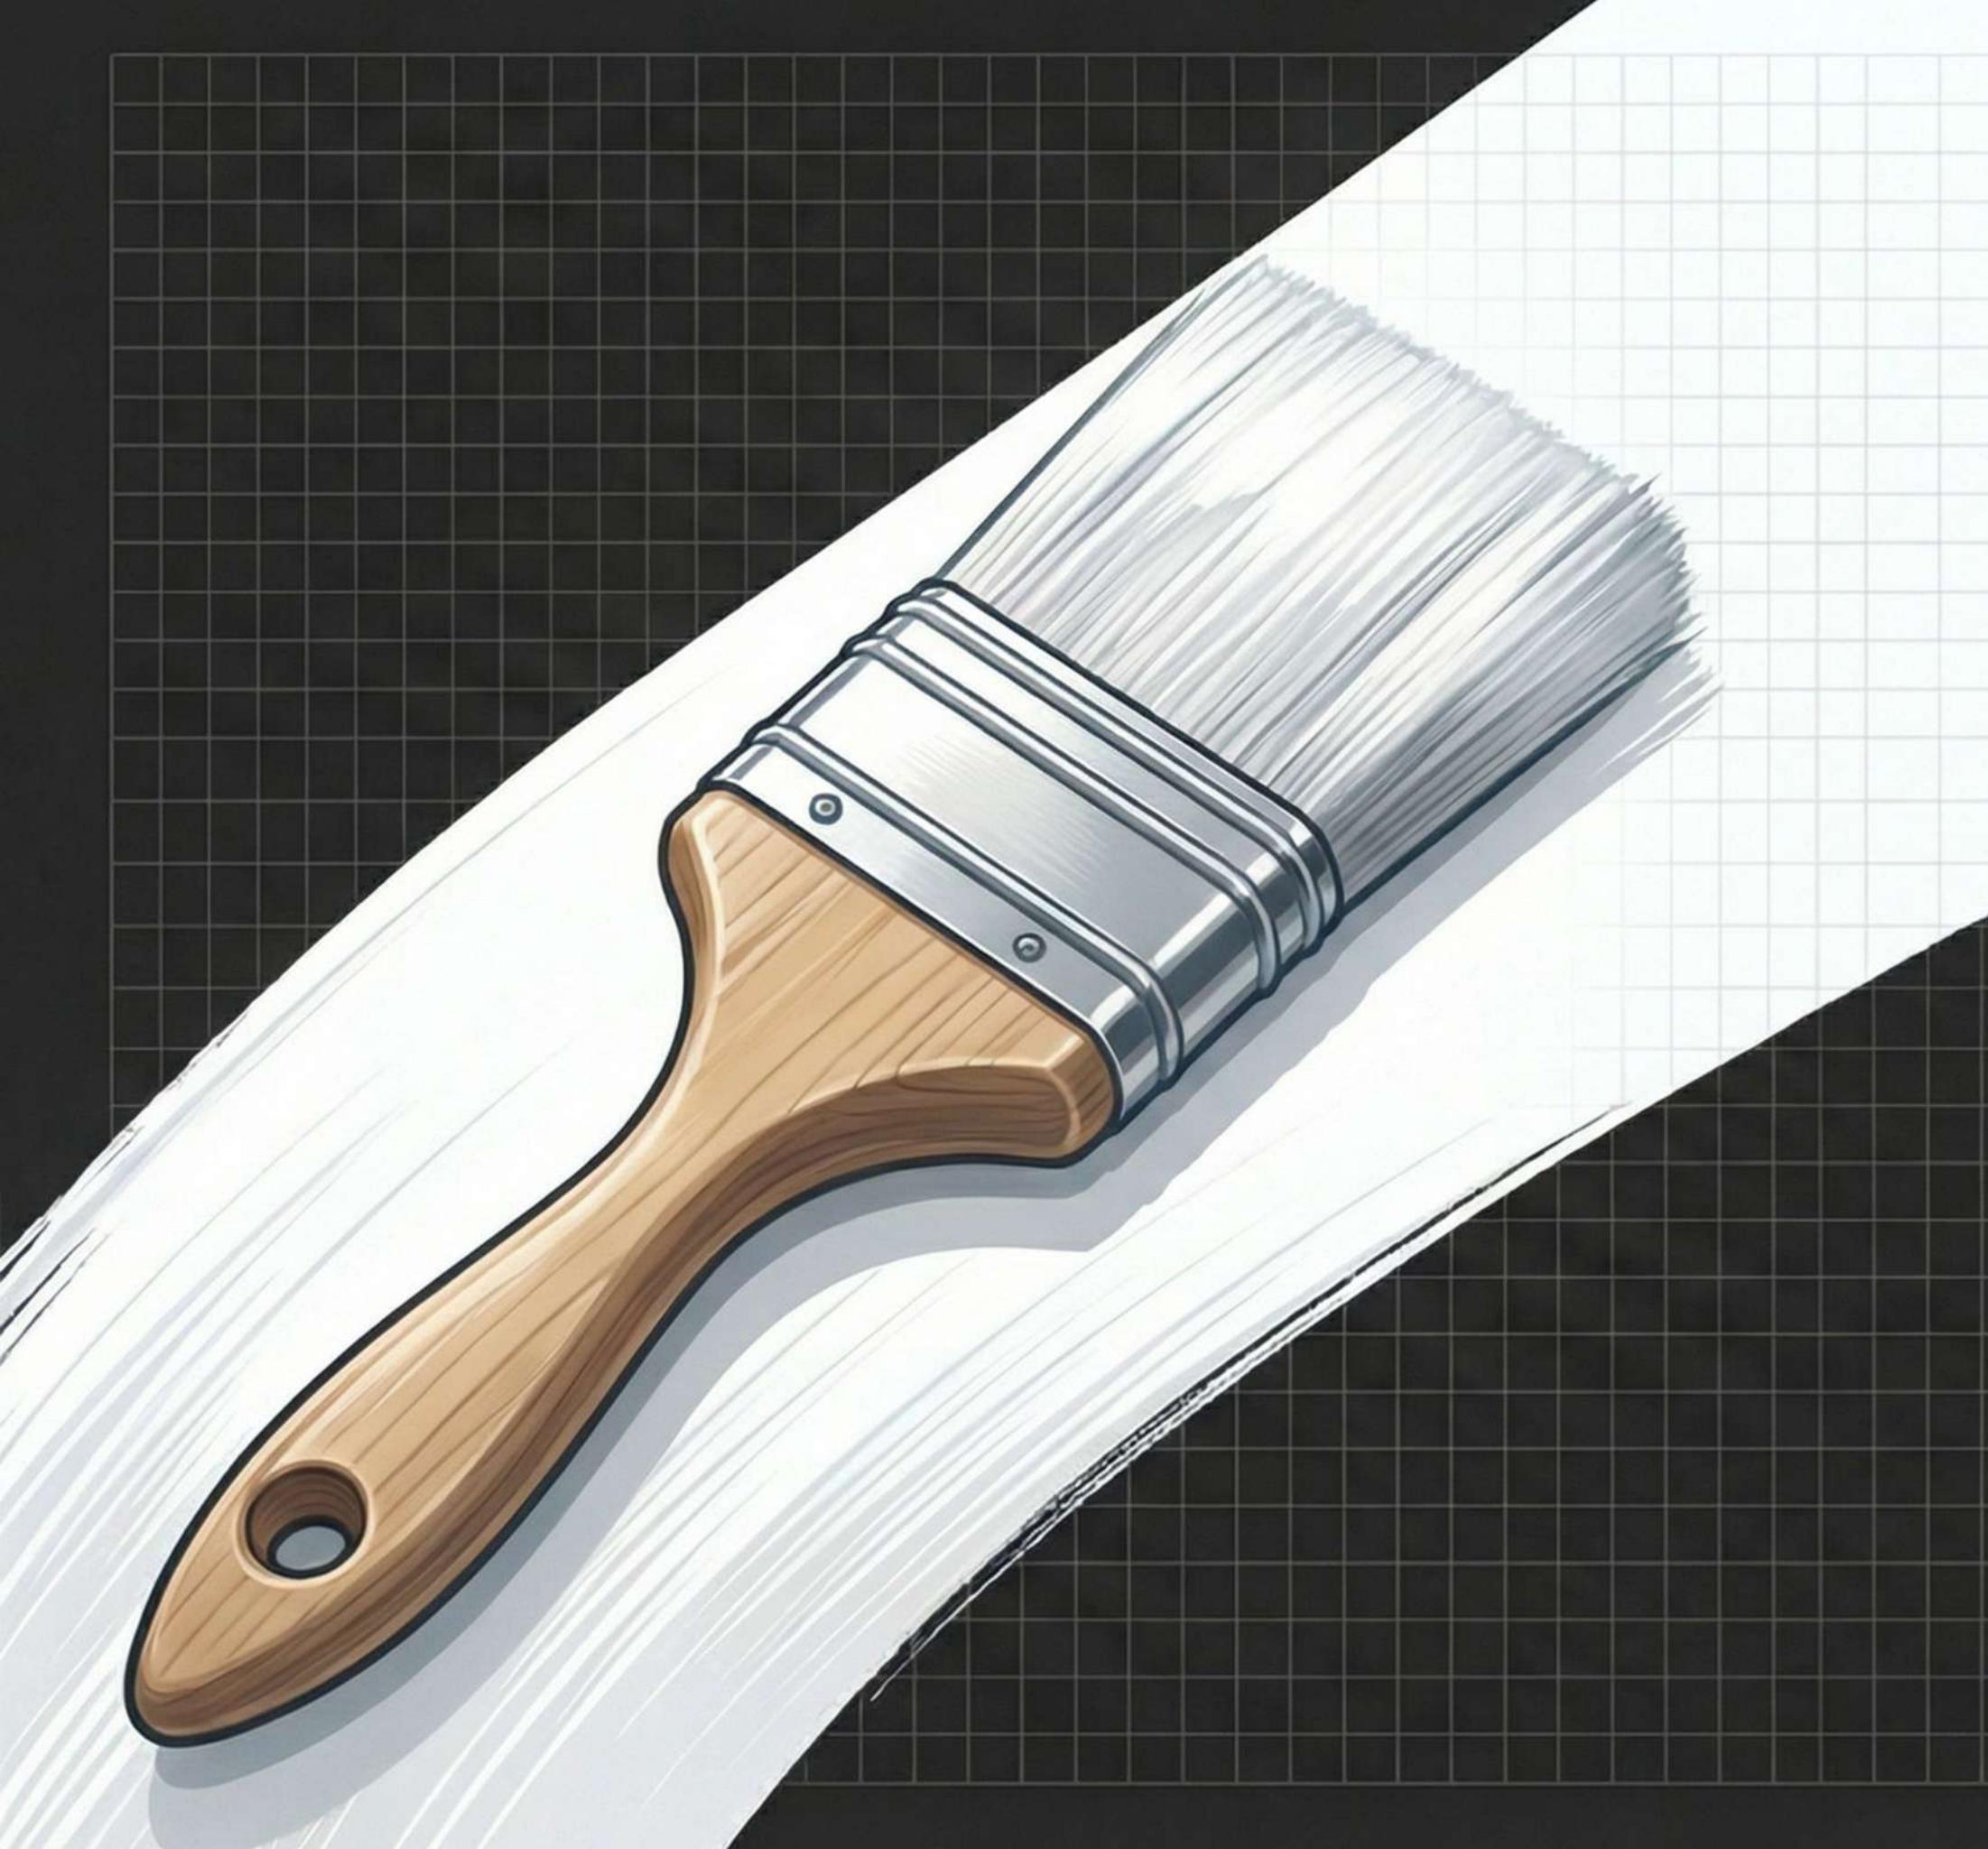

# APPLICATION PROFILE

## COMPOSITION

Water-based formula. Low odor.

## ELASTICITY

Adapts to thermal expansion.

## FINISH

Uniform White Satin.

## ADHESION

High grip on difficult surfaces.

# CRITICAL SPECIFICATIONS

**2-3 HOURS**

Touch Dry Time

**4-6 HOURS**

Recoat Interval

**< 20 g/L**

VOC Content

EU Limit: 140 g/L


**CAT. A/i**

EU Classification


Standard timing based on 20°C / 60% Relative Humidity.

# INTEGRATED RENOVATION SYSTEM

The Foundation of the Falcon Stema Solution.

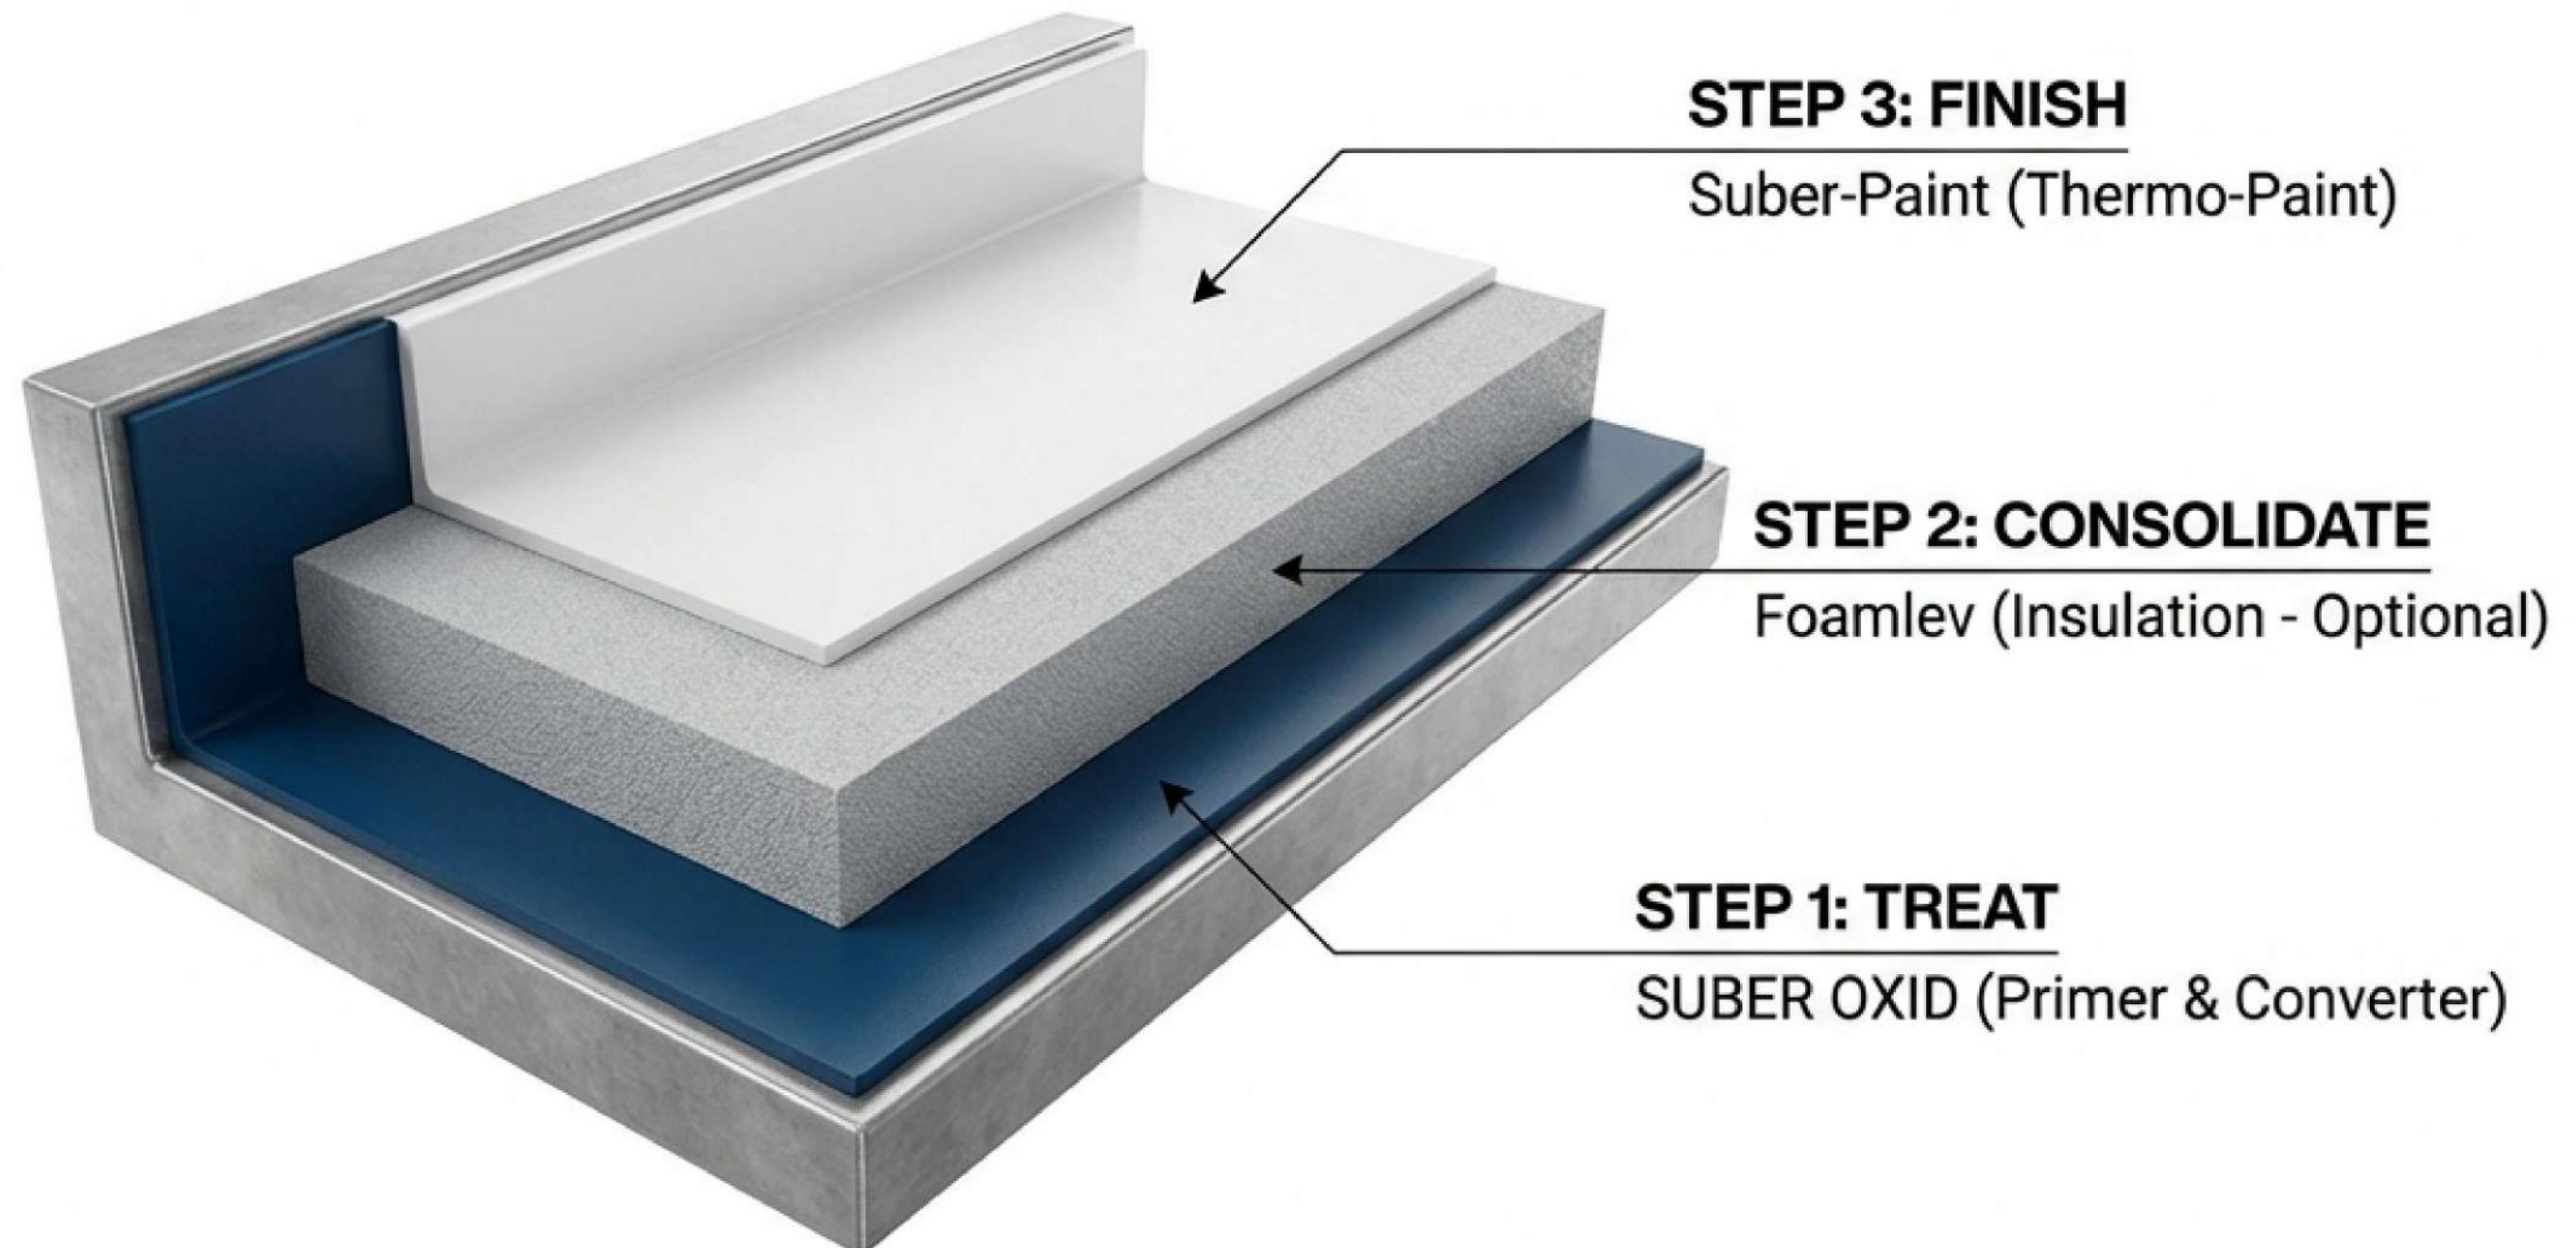

# Help Us Help You Innovation in Protection.

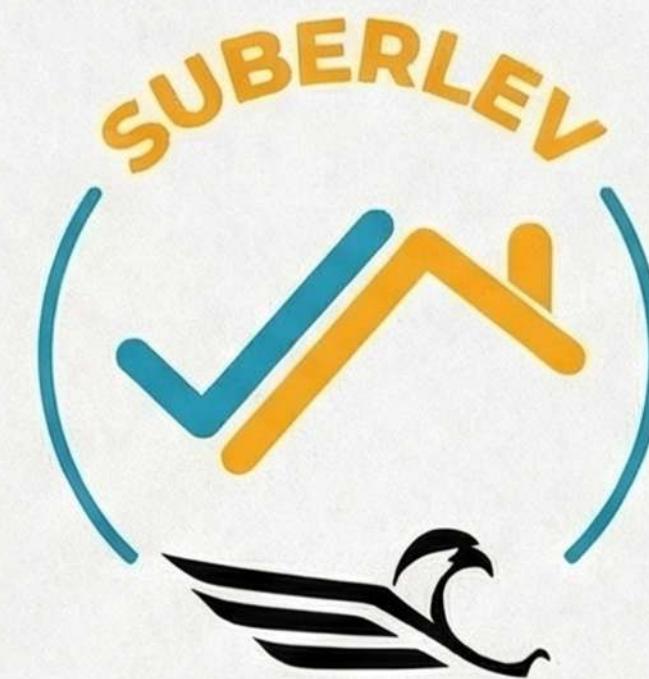

The information provided is based on extensive practical experience and laboratory tests.  
Practical tests are recommended to ensure compatibility for each specific application.